TOSHIBA

x4500

Bright performance

- Lens shift-function
- Extreme bright with 4,500 ANSI-lumens
- Powered zoom
- Ideal for installation
- Optional lenses

3LCD

LCD stands for Liquid Cristal Displays

TOSHIBA

x4500

These projectors are opportune for all conferences.

Display 3 x 1.0" Polysilicon TFT (MLA)
Resolution XGA 1,024 x 768
Brightness 4,500 ANSI-lumens
Colour reproduction 16.7 mio. colours
Contrast 750:1
Projection format 4:3 switchable to 16:9
Lamp 310 W (TLPLX45LAMP)
Max. lamp life up to max. 2,000 hours
Lens F = 1.7 - 2.4/f = 31 - 46 mm
Zoom 1.5 x
Frequency (hor./vert.) 15 - 91 kHz/50 - 120 Hz
Projection front, rear and ceiling
Digital keystone correction vertical & horizontal +/- 10°
Picture size (diagonal) 1.0 m - 12.7 m
Projection distance 1.2 m - 23.2 m
Input signals NTSC/PAL/SECAM, VGA, SVGA, XGA, SXGA & UXGA (compr.)
Inputs DVI-D via MI-D, RGB (D-sub), composite video, S-video, 2 x component video (5 x BNC, 3 x cinch), 3 x audio (2 x stereo mini jack, 2 x cinch)
Outputs monitor (D-sub), audio (stereo mini jack)
Serial interface RS-232C, USB, LAN (RJ45), DC out
Power supply AC 100 - 120V, 220 - 240 V
Loudspeaker integrated
Dimensions (W x H x D) 420 x 320 x 150 mm
Weight 7.7 kg
Operation noise normal 34 dB / ECO mode 29 dB
Specials powered zoom, motor-lens shift, motor-focus, optional lenses
Accesories remote control with batteries, owners manual, RGB-, RCA-, audio- and power cable, M1D_USB mouse, lens cap, mouse remote controller set
Options ceiling mount, spare lamp, camera c001

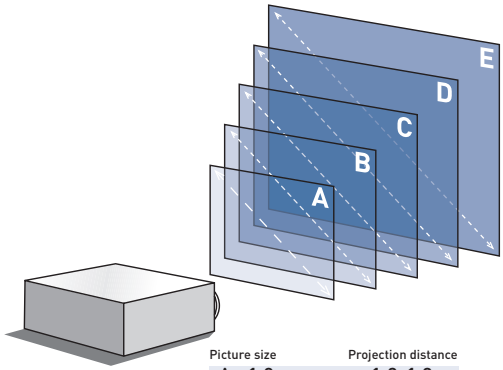

Picture size	Projection distance
A 1.0 m	1.2-1.8 m
B 2.5 m	3.0-4.6 m
C 3.8 m	4.6-6.9 m
D 6.4 m	7.7-11.6 m
E 12.7 m	15.5-23.2 m

September 2006 • Subject to modifications and errors

www.toshiba-europe.com/projectors

Toshiba Europe GmbH
Projection & Display Technology
Phone: ++49-2131-158-01 • Fax: ++49-2131-158-835
e-mail: projektoreninfo@toshiba-teg.com